

USER GROUP: 5-12 Years

RECOMMENDED CREW: 1-2 People

TOOLS REQUIRED:

- Level, Square
- Auger / Post Hole Digger / Shovel
- Drill Bits: None
- Metal / Hack Saw (Optional)
- Framing, Bracing, or Concrete Forms (Not Included)


INSTALLATION TIME: 1 Hour

WEIGHT: 108 lbs.

CONCRETE REQUIRED: (10) 80lb. bags - 6.0 ft<sup>3</sup>

NOTE: Concrete must have a minimum rating of 2,500 psi and must be mixed per manufacturer's recommendations.

ITEM	Part No.	QTY	DESCRIPTION
1	60019402XX	1	PLY Fitness Vertical Ladder

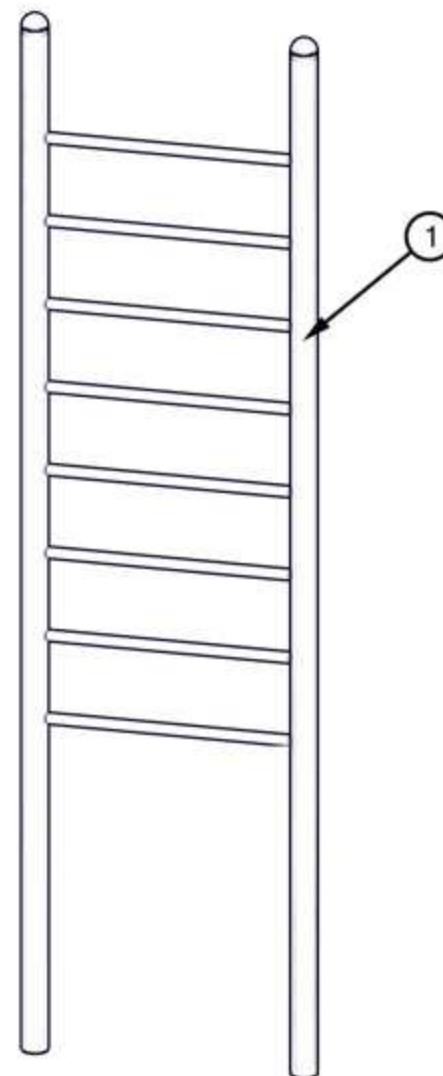

### PRE-INSTALLATION CHECK:

**Customer is responsible** for verifying materials received by comparing received items with packing list. If any parts are missing or damaged, including documentation, contact your local sales representative immediately.

**Supplier is not responsible** for items discovered missing after 72 hours from time of delivery.

**Before beginning installation, all installers must read and understand the Installation Introduction manual as supplied.** If you did not receive a copy, or if you have any questions regarding any information in the Installation Instructions or this Installation Guideline, contact your local sales representative.

### STEP 1

Prepare footing holes. Refer to site plan drawing and site elevation drawing for placement of all support posts. Installer is responsible for proper location of all support posts. Footing hole spacing is shown at right. Footing holes for support posts must be 18" diameter and 24" deep plus 12" surfacing. If surfacing is less than 12", adjust footing hole depths as needed. Place one block (not included) into bottom of each footing hole. See Detail 1-1. Place assembly into footing holes and plumb. Center of bottom rung should be 12" above surfacing. Fill footing holes with concrete to within 3" from ground surface. Allow concrete to cure based upon manufacturer's instructions. Backfill footing holes with dirt, flush with grade. Check all connections and ensure structure is stable. All concrete must be fully cured before use of structure. Installation is complete. Place one (1) Age Appropriate Sticker on structure in a clearly visible location.

### Detail 1-1

